

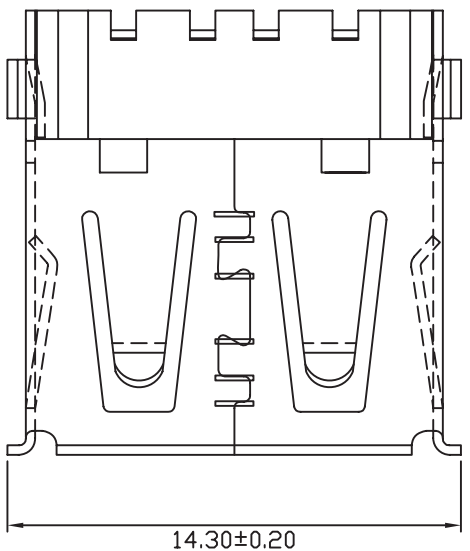
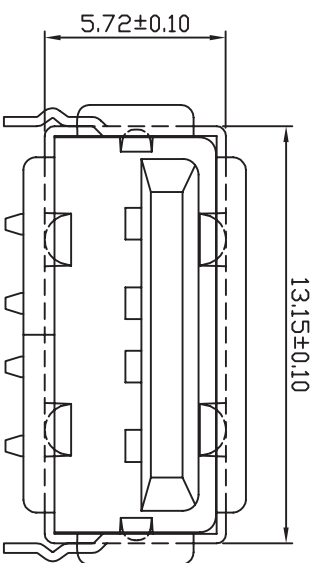
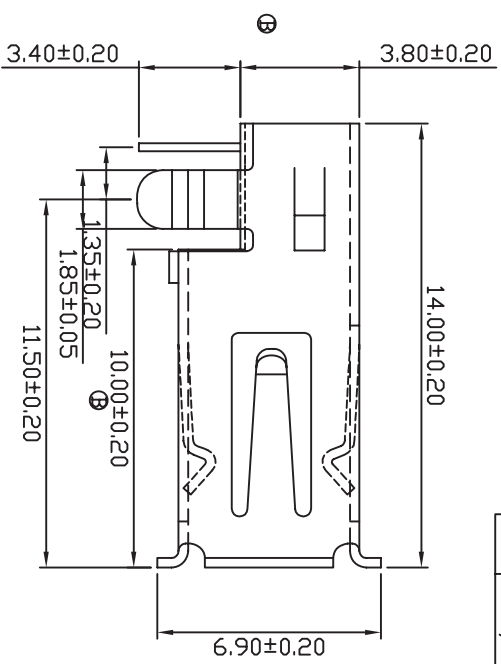


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2007/01/23	/	NEW	Vicky
B	2009/08/06	RD000309080601	按变:产品尺寸1.65±0.20变更为1.35±0.20,另增加产品尺寸	Vicky

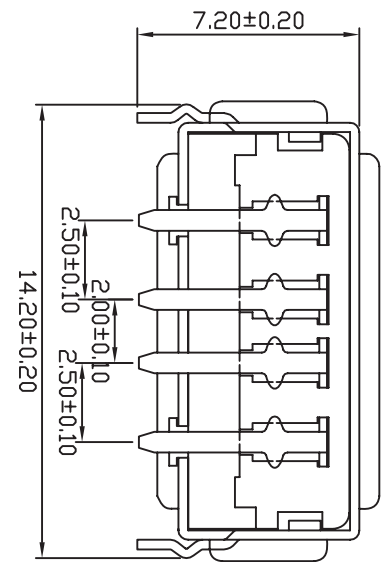

Specifications:
 Electrical:
 Contact Resistance:30mΩ Max
 Dielectric Withstanding Voltage: 500V AC AT Sea Level
 Insulation Resistance:1000MΩ Min
 Mechanical:
 Mating Force:4.0KG MAX
 Umating Force:0.7KG MIN Material:
 Housing:PBT,UL94V-O, Color: White/Black
 Contact:Phosphor Bronze/Copper Alloy
 Shell:Spcc/Copper Alloy
 Plating:
 Contact:Plated Gold in Mating Area;
 Tin on Solder Tails
 Shell:Nickel plating

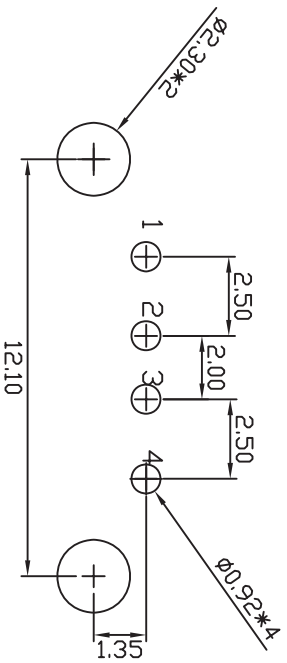

P.C.B LAYOUT

GENERAL TOLERANCE			UNITS mm		NAME: USB	
SELECT	1	2	3	MAT'L	PART NO:	TITLE: USB A/F 4P DIP 90° 沉板式
ON TOL	±0.10	±0.05	±0.15		USB304FA-A1002***	DWG NO. ATOM-A00079
X.XXX	±0.15	±0.13	±0.25	FINISH	APPD: Vicky	SCALE 1:1
X.XX	±0.20	±0.25	±0.50	Q'TY	CHKD: Amy	SHEET 1/1
X.	±0.30	±0.38	±1.00	ANGLE 45°	DR: Anna	REV B