

# 0.05"(1.27mm) Female Header

Single Row 02 to 50 contacts

SMT Type Profile: 2.2/3.6/4.5mm

Unit: mm

## APPLICATION AND FEATURES

Variable with gold plated.  
Mates with: N111, N115, N117

## SPECIFICATION

Current Rating: 1 Amps  
Insulator Resistance: 5000 Megohms min  
Dielectric Withstanding: AC 500 V  
Operating Temperature: - 40° ~ +105° C  
Contact Material: Copper Alloy  
Insulator Material: Polyester, UL 94V-0  
Finish: Tin, Gold Plated  
Standard: Gold Flash all over

## Ordering Information

N213 : Product Series



X : Connector Type (SMT Type)  
A: TYPE A  
B: TYPE B

X X : Number of Contacts  
No. of Contacts = Code  
02 thru 50


X : Plated Option  
1: Full Tin  
2: Gold Flash  
3: Gold 5u"  
4: Gold 10u"  
5: Gold 15u"  
6: Gold 30u"  
7: Option  
(Standard: 2)

H : Body Height  
For example:  
H= 3.6  
Please write out the code.

36

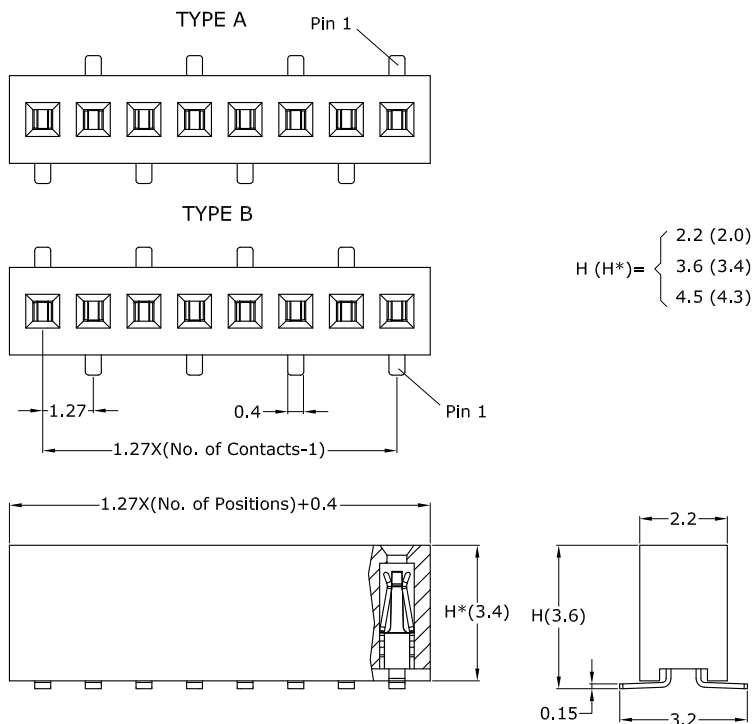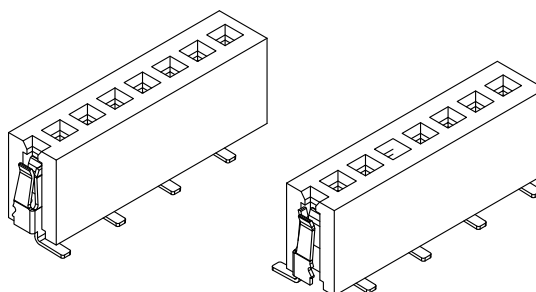

## Recommended P.C Board SMT Layout

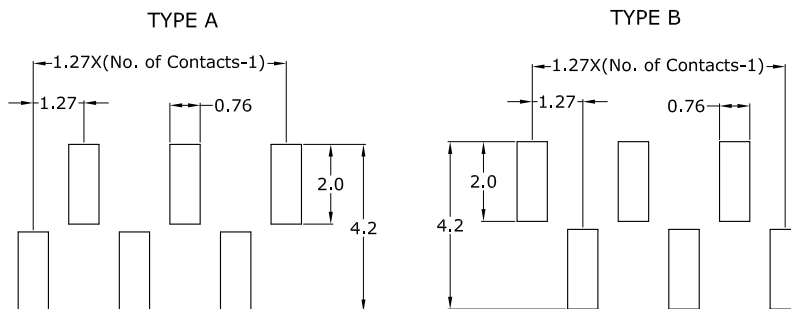

Products specifications are subject to be changed without notice  
Please contact sales office for further confirmation.