

0.05" X 0.05"(1.27mm X 1.27mm) Pin Header - 0.4mm Square Pin

Dual Row 06 to 100 contacts

SMT Type

APPLICATION AND FEATURES

Variable pin length.
Mates with: N220, N222, N223, N224

SPECIFICATION

Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: AC 500 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Finish: Tin, Gold Plated
Standard: Gold Flash all over

Ordering Information

N123 : Product Series

X : Connector Type
1: w/o post
2: with post

X X : Number of Contacts
No. of Contacts = Code
06 thru 100

X : Plated Option
1: Full Tin
2: Gold Flash
3: Gold 5u"
4: Gold 10u"
5: Gold 15u"
6: Gold 30u"
7: Option
(Standard: 2)



A / H / B : Pin Length
For example:
A= 3.0 H= 2.0 B= 2.5
Please write out the code.

30 / 20 / 25



Customers desire the length and put it in the

A / H / B


Unit: mm

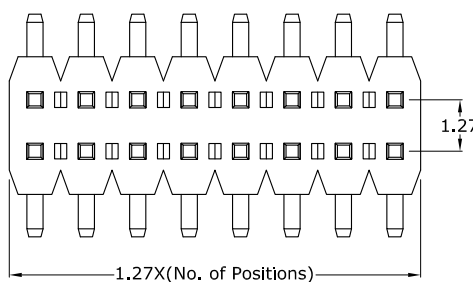

H = {
1.0
1.5
2.0
2.5

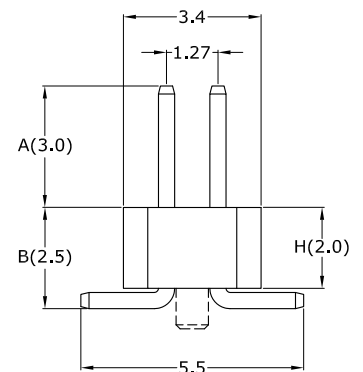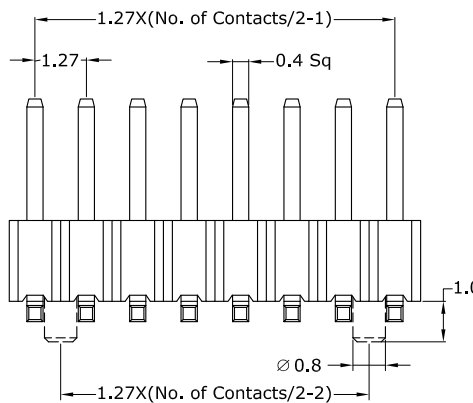

Recommended P.C. Board SMT Layout

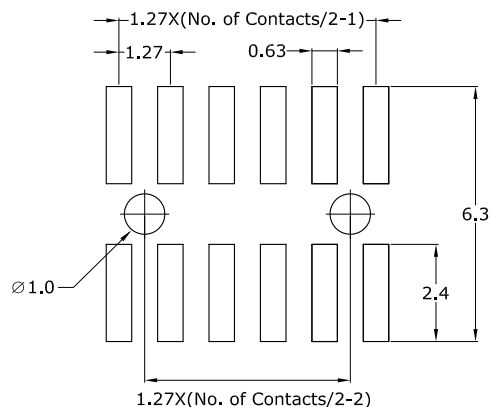

Products specifications are subject to be changed without notice
Please contact sales office for further confirmation.

1.27mm