

# 0.05"(1.27mm) Pin Header - 0.4mm Square Pin

Single Row 02 to 50 contacts

Thru-Hole Type Profile: 1.0/1.5/1.7/2.5mm

1.27mm

## APPLICATION AND FEATURES

Variable pin length, notches for easy breakable.  
Mates with:N212,N213

## SPECIFICATION

Current Rating: 1 Amps  
Insulator Resistance: 5000 Megohms min  
Dielectric Withstanding: AC 500 V  
Operating Temperature: - 40° ~ +105° C  
Contact Material: Copper Alloy  
Insulator Material: Polyester,UL 94V-0  
Finish: Tin,Gold Plated  
Standard: Gold Flash all over

## Ordering Information

N113 : Product Series  
|  
R : Connector Type (Right Angle Type)  
|  
X X : Number of Contacts  
No. of Contacts = Code  
02 thru 50  
|  
X : Plated Option  
1: Full Tin  
2: Gold Flash  
3: Gold 5u"  
4: Gold 10u"  
5: Gold 15u"  
6: Gold 30u"  
7: Option  
(Standard: 2)



A / H / C / B: Pin Length  
For example:  
A= 3.0 H= 1.5 C= 0.8 B= 2.6  
Please write out the code.

**30 / 15 / 08 / 26**



Customers desire the length and put it in the

**A / H / C / B**


Unit: mm

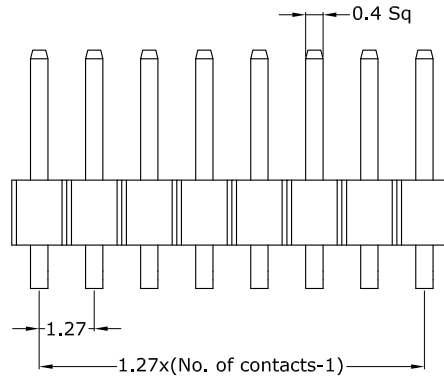

H = { 1.0  
1.5  
1.7  
2.5

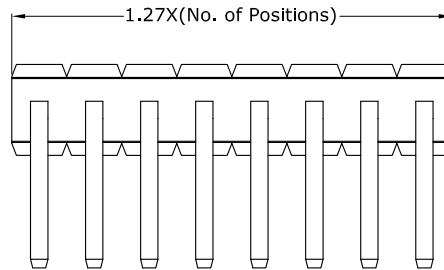

## Recommended P.C. Board Hole Layout



Products specifications are subject to be changed without notice  
Please contact sales office for further confirmation.