

0.05"(1.27mm) Pin Header - 0.4mm Square Pin

Single Row 03 to 50 contacts

SMT Type

APPLICATION AND FEATURES

N115 series headers are ideal for board stacking application.

Mates with: N212, N213

SPECIFICATION

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

Ordering Information

N115 : Product Series

X : Connector Type
 A: TYPE A
 B: TYPE B

XX : Number of Contacts
 No. of Contacts = Code
 03 thru 50

X : Plated Option
 1: Full Tin
 2: Gold Flash
 3: Gold 5u"
 4: Gold 10u"
 5: Gold 15u"
 6: Gold 30u"
 7: Option
 (Standard: 2)







A / H / B : Pin Length
 For example:
 A= 3.0 H= 1.5 B= 2.5
 Please write out the code.

30 / 15 / 25



Customers desire the length and put it in the

A / H / B

Unit: mm

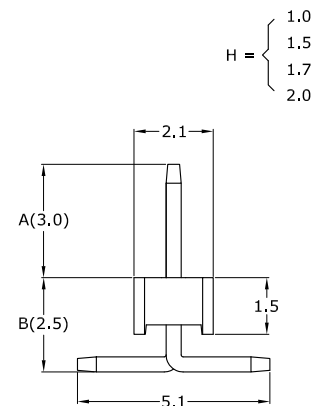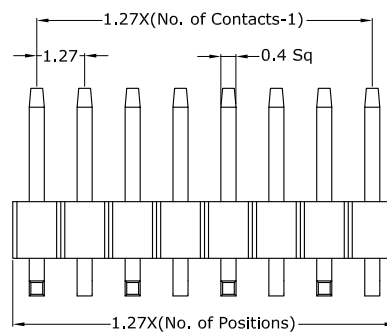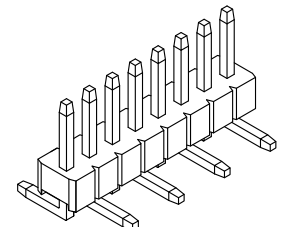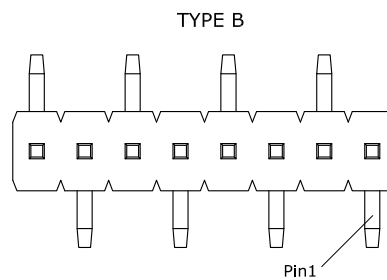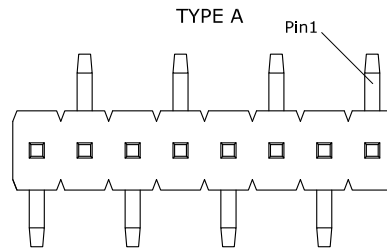

Recommended P.C. Board SMT Layout

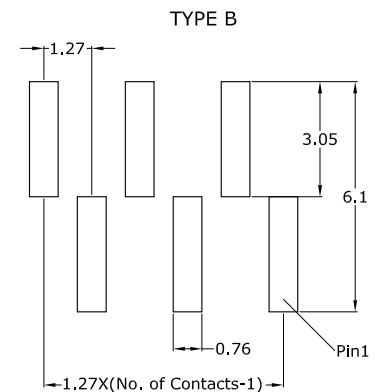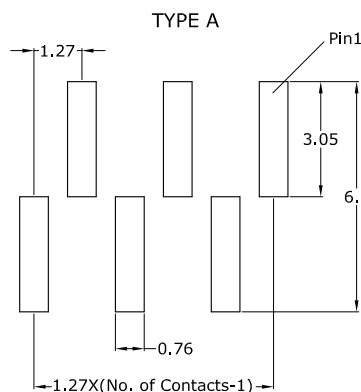

Products specifications are subject to be changed without notice
 Please contact sales office for further confirmation.