

0.1" X 0.1"(2.54mm X 2.54mm) Pin Header Box Type With Eject Latch

Dual Row 10 to 64 Contacts

Thru-Hole Type


APPLICATION AND FEATURES

Fully shrouded body provides maximum protection for contact pins.
Keying slots assure proper mating.
Reliable flat cable to P.C.Board interconnection.
Mates with:2.54mm IDC Female.

SPECIFICATION

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: AC 1000 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy
Insulator Material: Polyester,UL 94V-0
Finish: Tin,Gold Plated
Standard: Gold Flash all over


Unit: mm

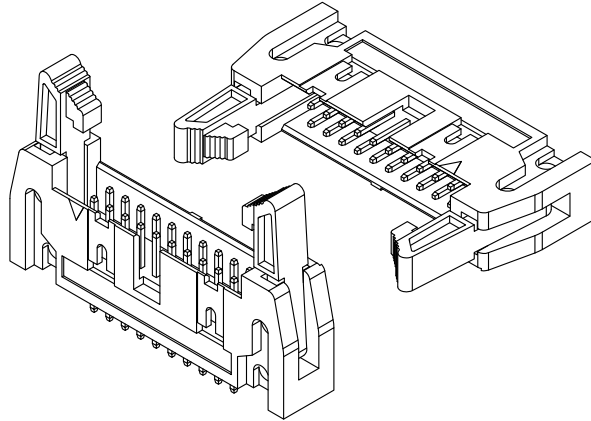


Ordering Information

- S140 : Product Series
- X : Connector Type
S: Straight Type
R: Right Angle Type
- XX : Number of Contacts
No. of Contacts = Code
10,12,14,16,20,24,26,30,34,40,
50,60,64
- X : Plated Option
1: Full Tin
2: Gold Flash
3: Gold 5u"
4: Gold 10u"
5: Gold 15u"
6: Gold 30u"
7: Option
(Standard: 2)
- B : Pin Length
For example:
B= 3.0
Please write out the code.

Customers desire the length and put it in the

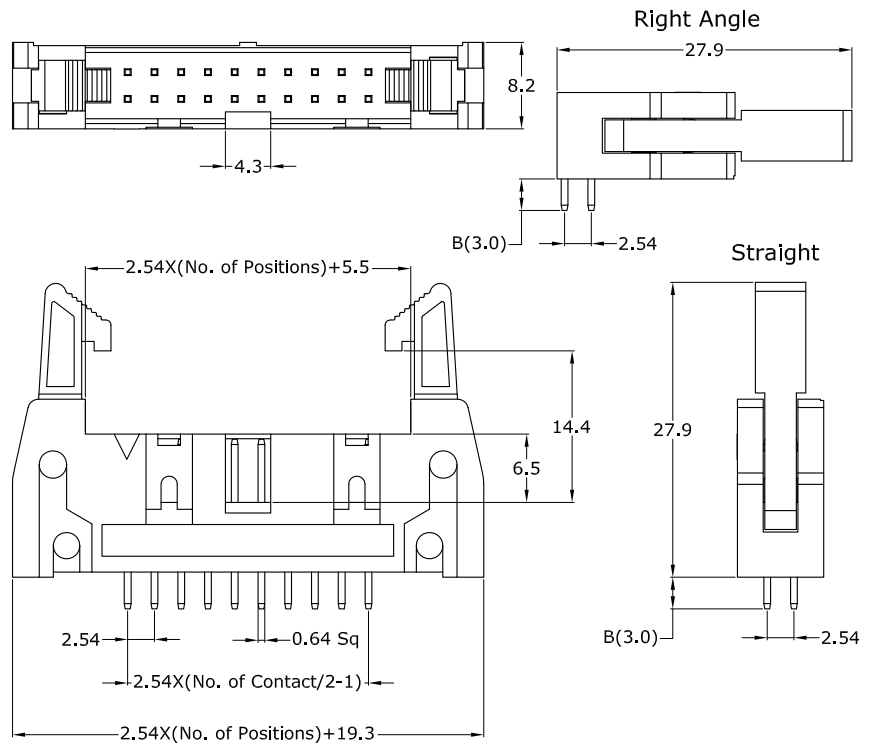

Recommended P.C. Board Hole Layout

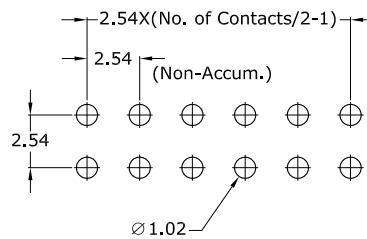

Products specifications are subject to be changed without notice
Please contact sales office for further confirmation.