

# 0.079" X 0.079"(2.0mm X 2.0mm) Female Header

Dual Row 08 to 80 Contacts

SMT Type Profile: 2.2mm





## APPLICATION AND FEATURES

Low Profile: 2.2mm height.  
High quality dual beam phosphor bronze contacts.  
Mates with: Q120, Q122, Q123, Q125, Q126

## SPECIFICATION

Current Rating: 1 Amps  
Insulator Resistance: 5000 Megohms min  
Dielectric Withstanding: AC 500 V  
Operating Temperature: - 40° ~ +105° C  
Contact Material: Copper Alloy  
Insulator Material: Polyester, UL 94V-0  
Finish: Tin, Gold Plated  
Standard: Gold Flash all over

Unit: mm

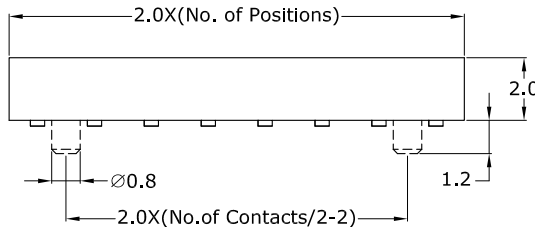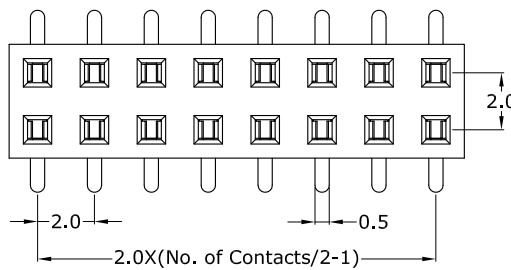

## Ordering Information

Q222 : Product Series


X : Connector Type (Straight Type)  
1: w/o post  
2: with post

X X : Number of Contacts  
No. of Contacts = Code  
08 thru 80

X : Plated Option  
1: Full Tin  
2: Gold Flash  
3: Gold 5u"  
4: Gold 10u"  
5: Gold 15u"  
6: Gold 30u"  
7: Option  
(Standard: 2)

H : Body Height  
For example:  
H= 2.2  
Please write out the code.  
22

## Recommended P.C Board SMT Layout

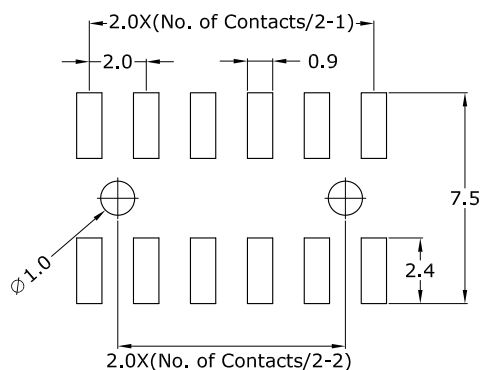

Products specifications are subject to be changed without notice  
Please contact sales office for further confirmation.