

# 0.05" X 0.05"(1.27mm X 1.27mm) Female Header

Dual Row 06 to 100 contacts

SMT Type Profile: 2.3mm

Unit: mm

## APPLICATION AND FEATURES




Variable with gold plated.  
Mates with: N120, N121, N123, N125

## SPECIFICATION


Current Rating: 1 Amps  
Insulator Resistance: 5000 Megohms min  
Dielectric Withstanding: AC 500 V  
Operating Temperature: - 40° ~ +105° C  
Contact Material: Copper Alloy  
Insulator Material: Polyester, UL 94V-0  
Finish: Tin, Gold Plated  
Standard: Gold Flash all over

## Ordering Information

N221 : Product Series  
|  
X : Connector Type (Straight Type)  
1: w/o post  
2: with post  
|  
X X : Number of Contacts  
No. of Contacts = Code  
06 thru 100  
|  
X : Plated Option  
1: Full Tin  
2: Gold Flash  
3: Gold 5u"  
4: Gold 10u"  
5: Gold 15u"  
6: Gold 30u"  
7: Option  
(Standard: 2)

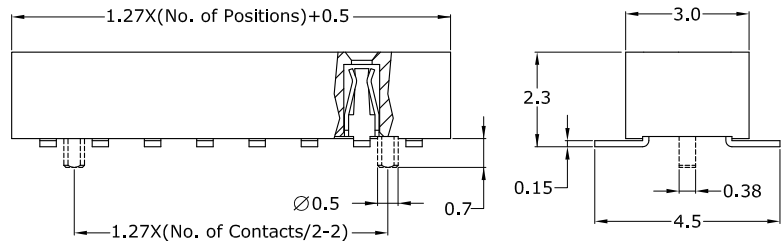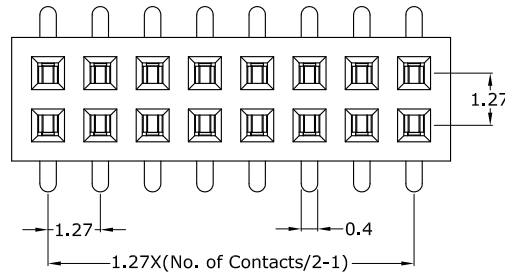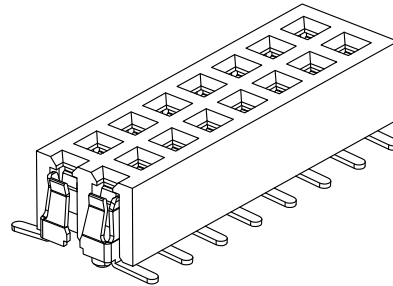

## Recommended P.C Board SMT Layout

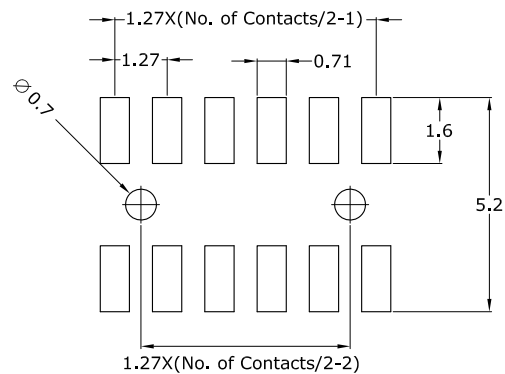

Products specifications are subject to be changed without notice  
Please contact sales office for further confirmation.