

0.039" X 0.039"(1.0mm X 1.0mm) Pin Header - 0.3mm Square Pin

Dual Row 06 to 100 contacts

SMT Type

1.0mm

APPLICATION AND FEATURES

Variable pin length.
Flexible stacking height feature
Mates with:L220,L221

SPECIFICATION

Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 500 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy
Insulator Material: Polyester,UL 94V-0
Finish: Tin,Gold Plated
Standard: Gold Flash all over

Ordering Information

L120 : Product Series

X : Connector Type

1: w/o post
2: with post

XX : Number of Contacts
No. of Contacts = Code
06 thru 100

X : Plated Option
1: Full Tin
2: Gold Flash
3: Gold 5u"
4: Gold 10u"
5: Gold 15u"
6: Gold 30u"
7: Option
(Standard: 2)



A / H / B : Pin Length
For example:
A= 1.9 H= 1.5 B= 2.0
Please write out the code.

19 / 15 / 20



Customers desire the length and put it in the

A / H / B


Unit: mm

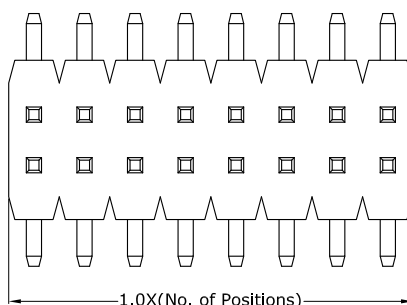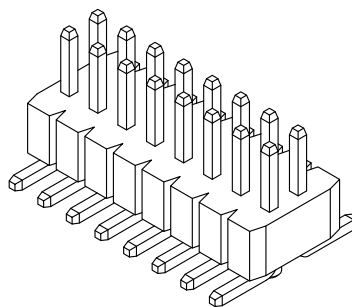

H = $\begin{cases} 1.0 \\ 1.5 \end{cases}$

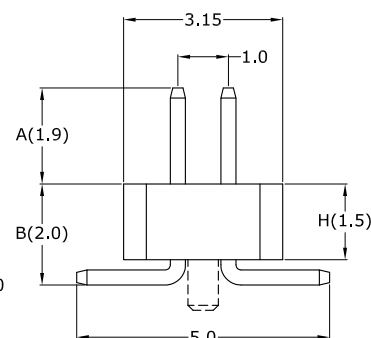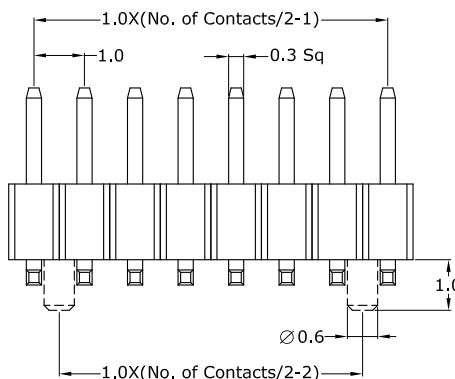

Recommended P.C. Board SMT Layout

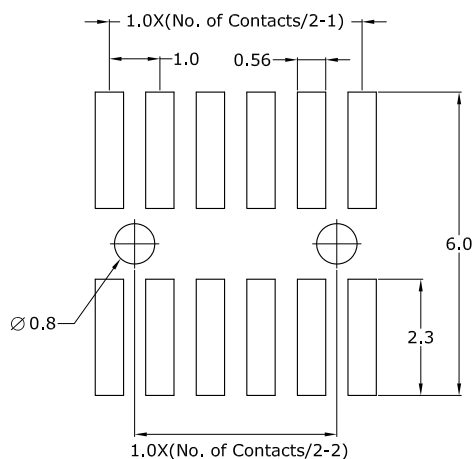

Products specifications are subject to be changed without notice
Please contact sales office for further confirmation.