

0.05"(1.27mm) Pin Header - 0.4mm Square Pin

Single Row 02 to 50 contacts

Thru-Hole Type Profile: 1.0/1.5/1.7/2.0mm


Unit: mm

APPLICATION AND FEATURES

Variable pin length.
Standoffs facilitate post soldering clean.
Mates with:N212,N213

SPECIFICATION

Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: AC 500 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy
Insulator Material: Polyester,UL 94V-0
Finish: Tin,Gold Plated
Standard: Gold Flash all over



Ordering Information

N111 : Product Series

S : Connector Type (Straight Type)

X X : Number of Contacts
No. of Contacts = Code
02 thru 50


X : Plated Option
1: Full Tin
2: Gold Flash
3: Gold 5u"
4: Gold 10u"
5: Gold 15u"
6: Gold 30u"
7: Option
(Standard: 2)

A / H / B : Pin Length
For example:
A= 3.0 H= 1.5 B= 3.0
Please write out the code.


30 / 15 / 30

Customers desire the length and put it in the


A / H / B

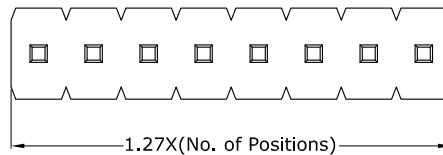

H = { 1.0
1.5
1.7
2.0

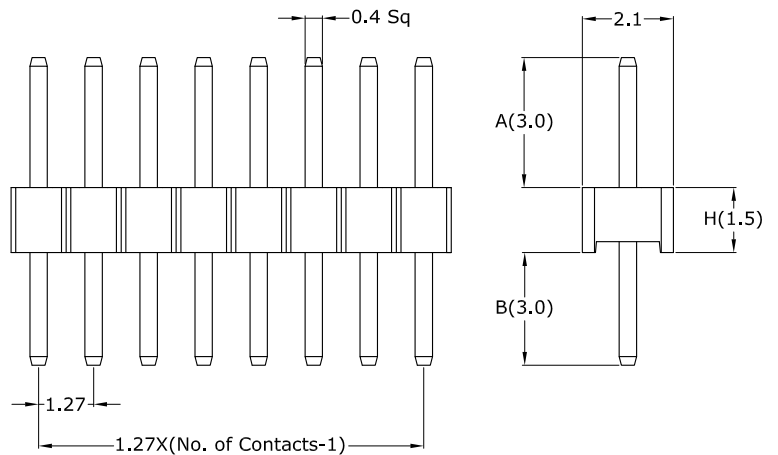

Recommended P.C. Board Hole Layout



Products specifications are subject to be changed without notice
Please contact sales office for further confirmation.