

0.1"(2.54mm) Pin Header

Triple Row 06 to 120 Contacts

Thru-Hole Type Profile: 2.5mm

Unit: mm

APPLICATION AND FEATURES

- Notches for easy breakable.
- Variable pin length.
- Standoffs facilitate post soldering clean
- Mates with: S290

SPECIFICATION

- Current Rating: 3 Amps
- Insulator Resistance: 5000 Megohms min
- Dielectric Withstanding: AC 1000 V
- Operating Temperature: - 40° ~ +105° C
- Contact Material: Copper Alloy
- Insulator Material: Polyester, UL 94V-0
- Finish: Tin, Gold Plated
- Standard: Gold Flash all over

Ordering Information

S190 : Product Series

S : Connector Type (Straight Type)

X X : Number of Contacts
No. of Contacts = Code
06 thru 120




X : Plated Option
1: Full Tin
2: Gold Flash
3: Gold 5u"
4: Gold 10u"
5: Gold 15u"
6: Gold 30u"
7: Option
(Standard: 2)

A / B : Pin Length
For example:
A= 6.0 B= 3.0
Please write out the code.


60 / 30

Customers desire the length and put it in the

A / B

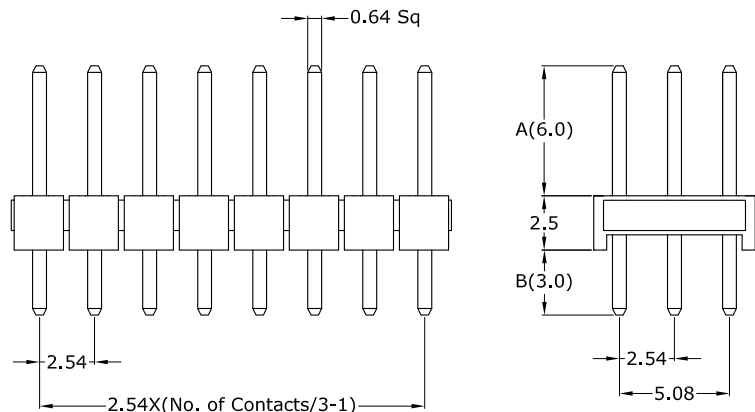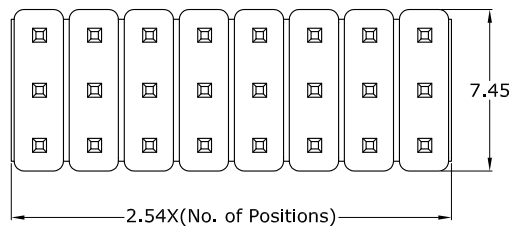

Recommended P.C. Board Hole Layout

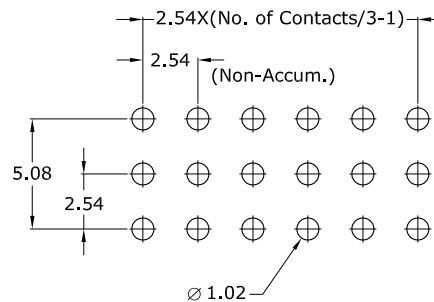

Products specifications are subject to be changed without notice
Please contact sales office for further confirmation.