0.079" X 0.079(2.0mm X 2.0mm) Female Header

Dual Row 04 to 80 Contacts — Thru-Hole Type Profile: 6.3mm

2.0mm

APPLICATION AND FEATURES

Low Profile:6.3mm height.
High quality phosphor bronze contacts.
Designed for board to board small spacing interconnection.
Mates with:Q120,Q123

SPECIFICATION

Current Rating:	1 Amps
Insulator Resistance:	5000 Megohms min
Dielectric Withstanding:	AC 500 V
Operating Temperature:	- 40° ~ +105° C
Contact Material:	Copper Alloy
Insulator Material:	Polyester,UL 94V-0

Finish: Tin,Gold Plated
Standard: Gold Flash all over

Ordering Information

Q241 : Product Series

X : Connector Type (Straight Type)
S: Straight Type
R: Right Angle Type

X X : Number of Contacts
No. of Contacts = Code
04 thru 80

X : Plated Option
1: Full Tin
2: Gold Flash
3: Gold 5u"
4: Gold 10u"
5: Gold 15u"
6: Gold 30u"
7: Option
(Standard: 2)

Unit: mm

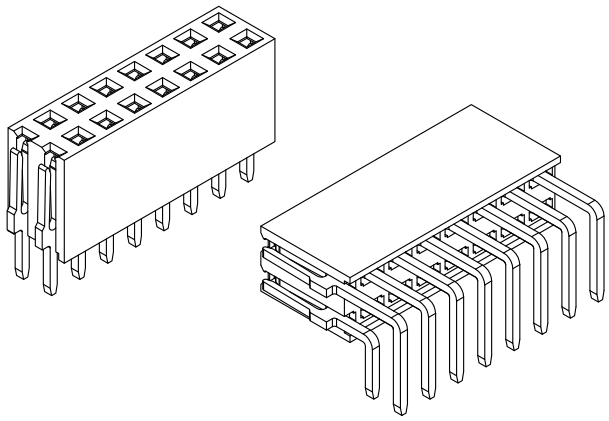

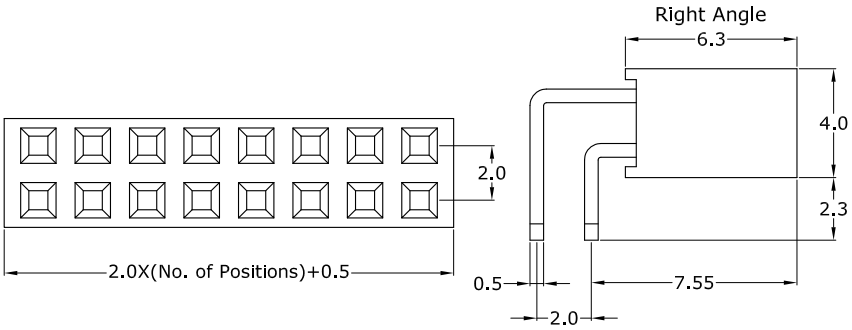

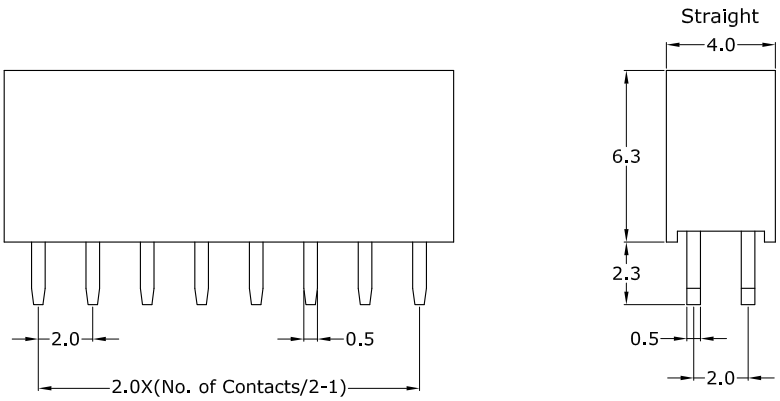

Recommended P.C Board Hole Layout

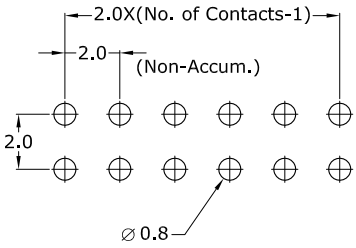

Products specifications are subject to be changed without notice
Please contact sales office for further confirmation.