

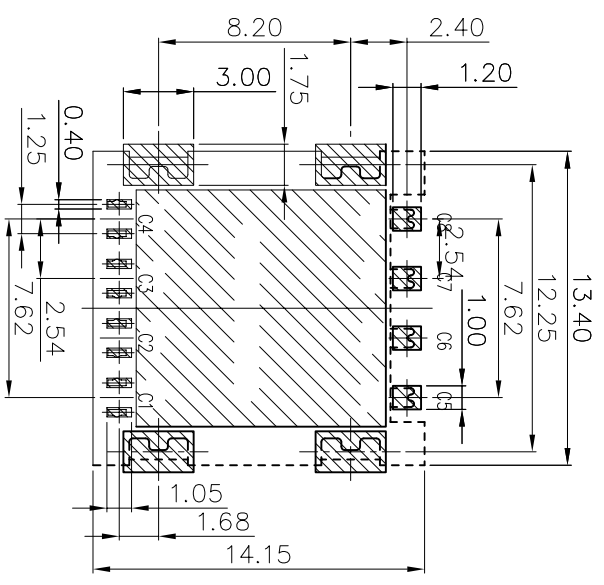
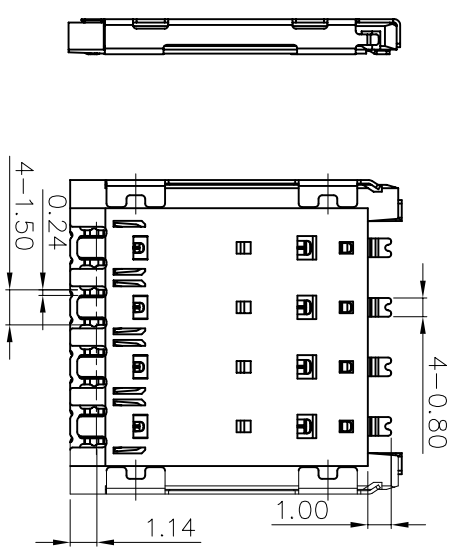
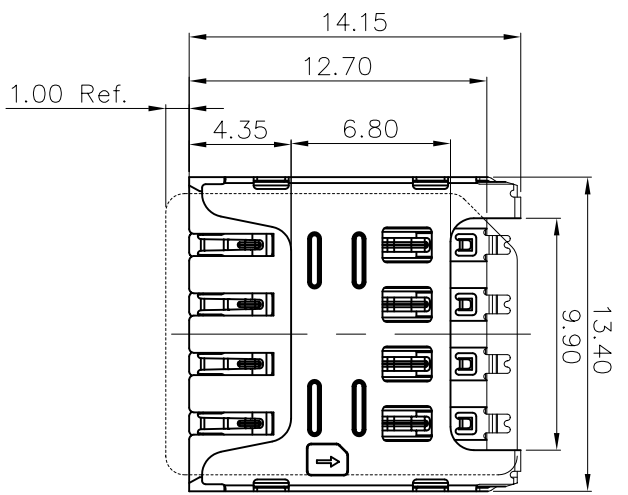
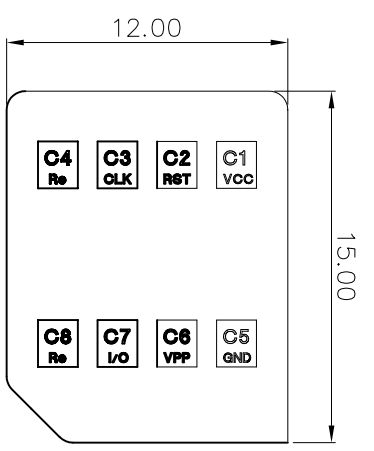


REV. A	DATE 2017/01/10	ECN NO. /	MODIFICATION NEW	APPROVER Vicky
--------	-----------------	-----------	------------------	----------------



P.C.B layout

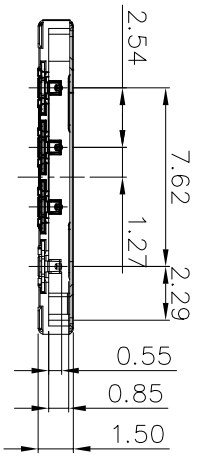

- NOTES:
- Contact Resistance: 50mohm MAX
 - Insulation Resistance: 1000Mohm MIN 500V DC
 - Dielectric withstanding voltage: 500V AC.
 - Durability: 5000 Cycles
 - Positive forces: 0.2-0.9 N 0.76 mm thick
 - Terminal retention: 4.5 N Min

GENERAL TOLERANCE		UNITS mm		NAME: SIM CARD	
SELECT	✓			PART NO: S161C-08200	TITLE: MICRO SIM CARD 8P SMT H=1.5mm
ON TOL	1	2	3	APPD: Vicky	DWG NO: ATOM-A03325
X.XXX		±0.08	±0.15	CHKD: Doris	SCALE 1:1
X.XX		±0.20	±0.13	DR: Cmy	SHEET 1/1
X.X		±0.25	±0.50		SHEET REV A
X.		±0.35	±1.00		
ANGLE	±2°				

NO.	product	QTY	spec
1	Housing		HIGH THERMOPLASTIC, UL 94 V-0, BLACK
2	Contact	8	COPPER ALLOY, Gold Flash on Contact Solder Area; Over Nickel Plating
3	Shell	1	SUS, Gold Flash on Contact Solder Area; Over Nickel Plating